

## 20mm RC MKIII Disrupter

### GENERAL SPECIFICATIONS

Bore Diameter:	20 mm (0.8")
Total Length:	54 cm (21")
Total Weight:	3.9 kg (8.6 lbs)
Height on Stand:	183 cm (72") Maximum
Composition:	Stainless Steel, Titanium, Aluminium & Polyurethane
Ignition Voltage:	24 volts; 1 amp
Laser System:	20 mm Single or Dual Laser Pointer
Liquid Projectile:	100 ml (3.4 oz.)
Liquid Load:	200 ml (6.8 oz.)
Peak Liquid Projectile Velocity:	360 m/s (1,180 ft/s)
Kinetic Energy:	3.1 kJ
Recoil Reduction:	Yes
Vertical Adjustment:	180°
Horizontal Adjustment:	360°, for multi-purpose positioning
Barrel Composition:	Stainless Steel, Ployurethane
Barrel Length:	38 cm (15")
Barrel Weight:	2.0 kg (4.4 lbs.)




20mm RC MKIII Disrupter on Tripod

### DESCRIPTION

The 20mm RC MKIII is the ultimate disrupter for robotic applications. At 4.9 kg loaded and ready to fire, the recoilless technology allows for maximum impact with reduced stress on robotic arms. The 20mm RC MKIII disrupter is quick to deploy and load in under 4 minutes. Mounted on a flexible tripod, the 20mm RC MKIII can be positioned to approach complex firing angles. This allows operators to successfully disrupt and de-arm the most challenging encounters. It is designed to disrupt medium sized targets with a maximum recommended standoff of 3 metres (10 ft.) for water shots, dependent on target.

### AMMUNITION

- A - Electrically Primed Cartridge (Low, Medium, High and Ultra High Velocity)
- B - 20 mm Avon Frangible (De-Armer)
- C - 20 mm Flathead Steel Slug (De-Armer)
- D - 20 mm Enhanced Chisel Head Steel Slug (De-Armer)
- E - 20 mm Spade (De-Armer)
- F - Gel Shot

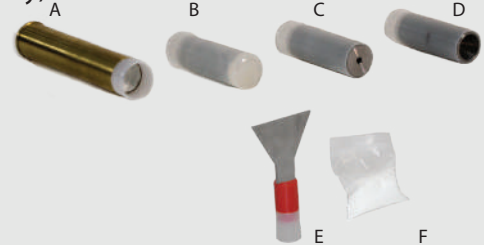

*Ammunition is not included as part of the system. Warranty valid only with the use of Proparms ammunition.*

### ACCESSORIES



P2 Blasting Machine



Wire Wheel



Bore Sight Laser



20mm Single Laser Pointer



20mm Dual Laser Pointer



Knapsack