


POLYURETHANE BINDING MATERIALS STONE CARPET

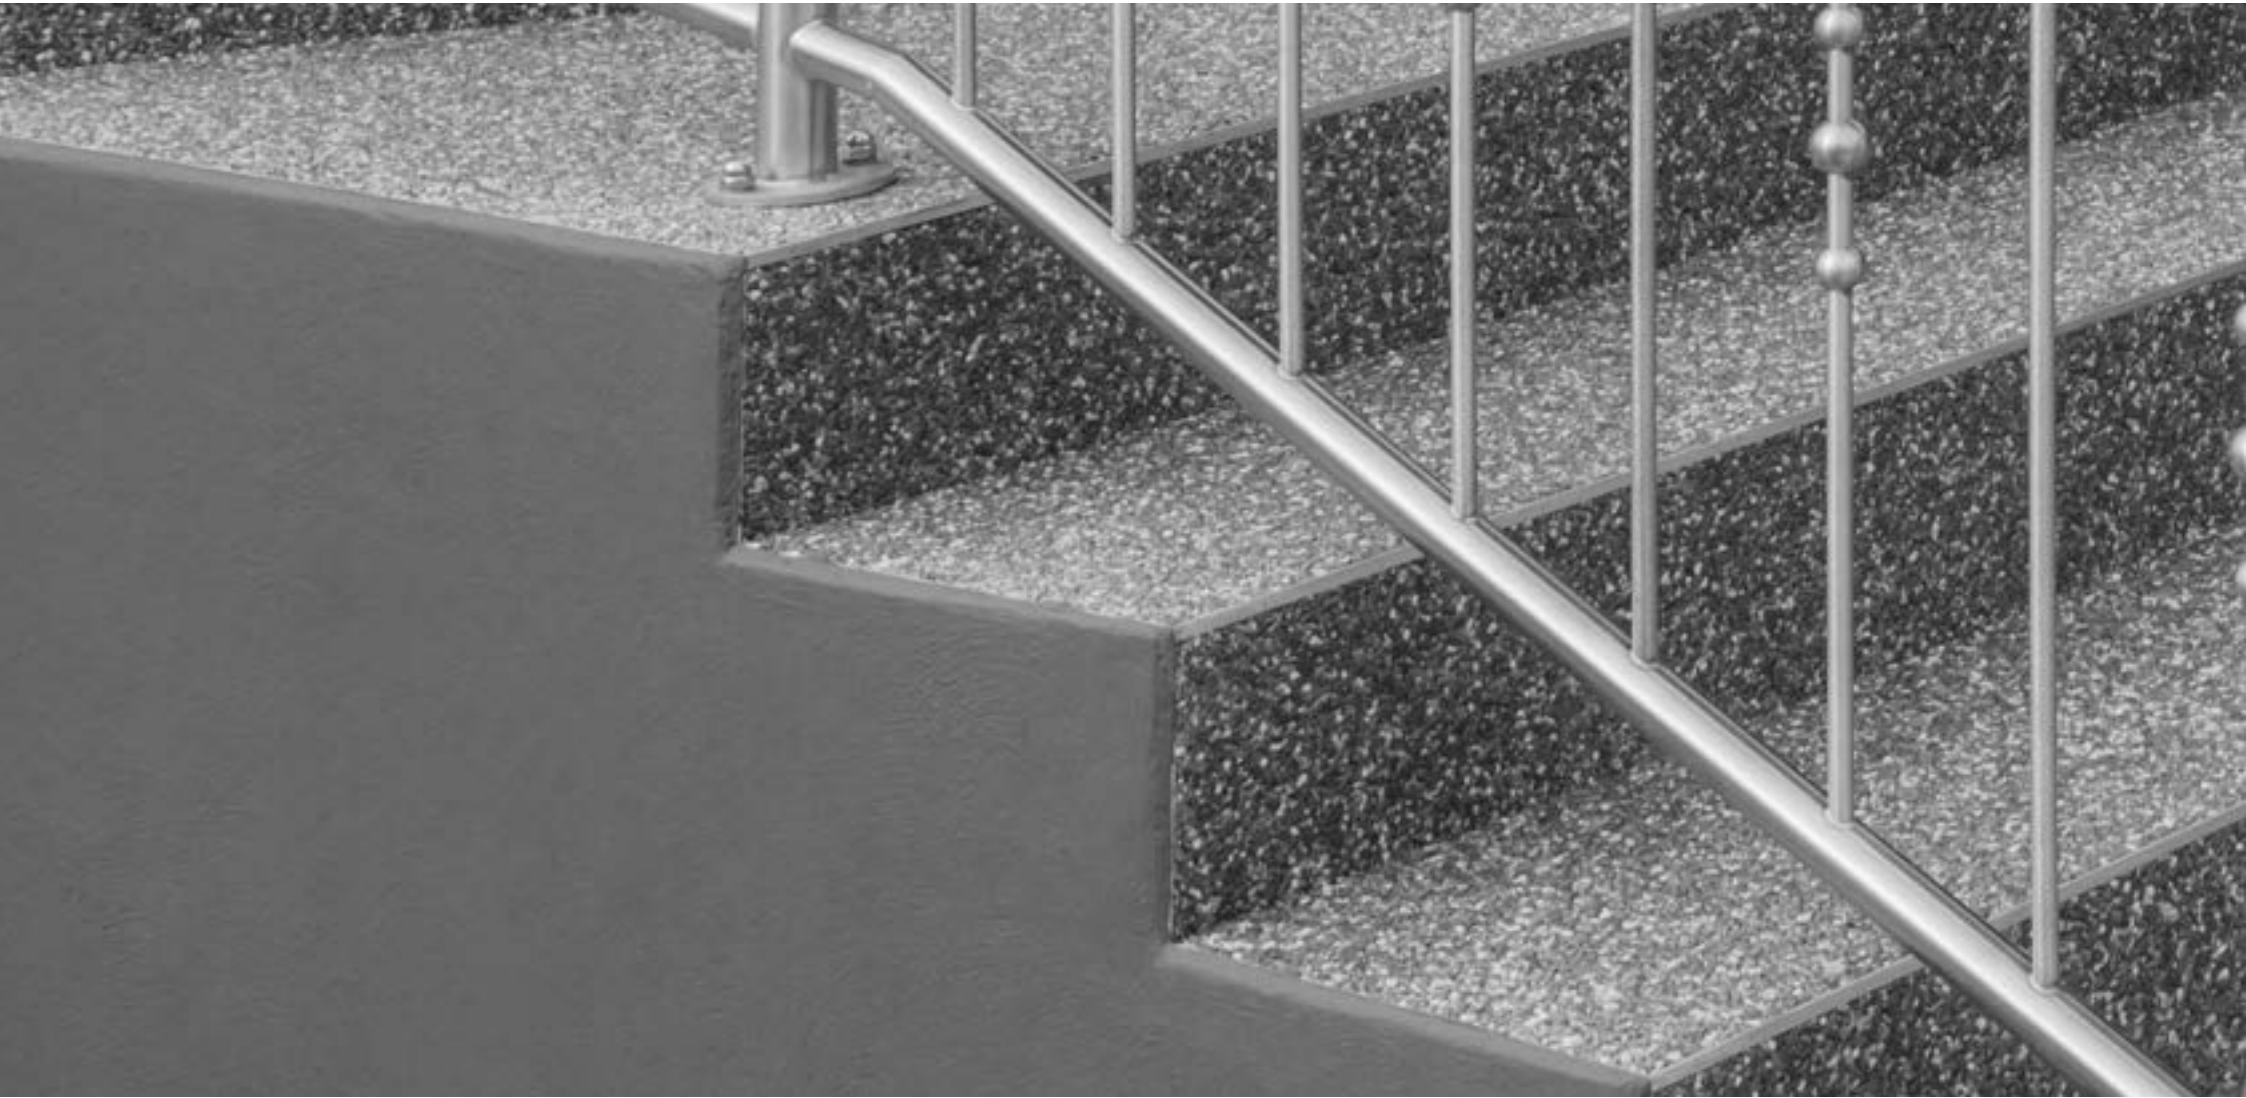

EUROPUR 0820

EUROPUR 0820 is a transparent, solvent-free binder that is characterised by its vapour-permeable and largely UV-resistant properties. This high-quality product not only offers excellent mechanical resistance, but also remarkable chemical resistance, making it an ideal choice for a wide range of applications. EUROPUR 0820 also impresses with its resilient properties, which enable flexible use and optimum adaptation to different conditions.

APPLICATION AREAS

- EUROPUR 0820 is used as a binder for indoor and outdoor stone carpet coverings. Mainly made from fire-dried coloured quartz or marble gravel.

PRODUCT FEATURES

- solvent-free
- good weather and extensive UV resistance
- Very good chemical and mechanical properties





TACTICAL
— SUPPLY PAKISTAN —

AT A GLANCE

COLOUR	Transparent
MATERIAL BASIS	Aliphatic PU resin
VISCOSITY AT +23°C	2500 - 3500 mPas
CURING TIME AT +23°C/50% R.H.	approx. 24 hours
NUMBER OF COMPONENTS	2
DENSITY AT 23°C/50% R.H.	ca. 1,1 g/cm3
DURABILITY	Weather, UV and ageing resistant
FULL RESILIENCE	7 days
STORAGE AND SHELF LIFE	Cool and dry, +10°C to +25°C, 12 months in unopened original container
PROCESSING CONDITIONS	Processing temperature: +10 to +25 °C
MIXING RATIO	A : B = 1 : 1,08
PROCESSING TIME	50 min

CONTENTS	Item number
5 KG	4008200000EK005
10 KG	4008200000EK010
25 KG	4008200000EK025



EUROPUR 0825

EUROPUR 0825 is a highly developed, transparent binder that is characterised by its vapour-permeable and highly UV-resistant properties. This solvent-free product not only offers excellent mechanical and chemical resistance, but also impresses with its resilient properties, which enable flexible and reliable application in various environments. EUROPUR 0825 is therefore an excellent choice for applications where both durability and adaptability are required.

APPLICATION AREAS

- EUROPUR 0825 is used as a binder for interior and especially exterior stone carpet coverings. Mainly made from fire-dried coloured quartz or marble gravel.

PRODUCT FEATURES

- solvent-free
- Very good weather and UV resistance
- Very good chemical and mechanical properties
- high quality



AT A GLANCE

COLOUR	Transparent
MATERIAL BASIS	Aliphatic PU resin
VISKOSITÄT BEI +23°C	1500 - 2500 mPas
CURING TIME AT +23°C/50% R.H.	approx. 24 hours
NUMBER OF COMPONENTS	2
DENSITY AT 23°C/50% R.H.	approx. 1.1 g/cm3
DURABILITY	Very good weather and UV resistance
FULL RESILIENCE	7 days
STORAGE AND SHELF LIFE	Cool and dry, +10°C to +25°C, 12 months in unopened original container
PROCESSING CONDITIONS	Processing temperature: +15 to +30 °C
MIXING RATIO	A : B = 1 : 1
PROCESSING TIME	60 min

CONTENTS	Item number
5 KG	4008250000EK005
10 KG	4008250000EK010
25 KG	4008250000EK025

