



EUROPUR 0420

EUROPUR 0420 is a transparent, semi-gloss polyurethane sealer that is characterised by its elastic, vapour-permeable and weather-resistant properties. This versatile sealer offers long-lasting protection for various surfaces and is ideal for use in demanding outdoor areas. EUROPUR 0420 not only ensures an attractive appearance, but also reliable resistance to weathering.

APPLICATION AREAS

- is used to seal balcony and patio surfaces and as a binding agent for the production of natural stone carpet coverings.

PRODUKTEIGENSCHAFTEN

- Solvent-based
- UV stable
- Very good weather resistance
- shiny
- Vapour permeable





TACTICAL
— SUPPLY PAKISTAN —

AT A GLANCE

COLOUR	Transparent, semi-gloss
MATERIAL BASIS	Polyurethane
MATERIAL CONSUMPTION	0,15-0,25 kg/m2
NUMBER OF COMPONENTS	1
CONSISTENCY	Medium viscosity
PROCESSING TIME	5 - 30 min
CHEMICAL RESISTANCE	no
DURABILITY	Very good weather resistance UV stable
STORAGE AND SHELF LIFE	Cool and dry, +10°C to +25°C, 12 months in unopened original container
PROCESSING CONDITIONS	Processing temperature +10 to +25 °C

CONTENTS	Item number
5 KG	4004200000E1005
12,5 KG	4004200000E1125



EUROPUR 0425

EUROPUR 0425 is a glossy, elastic polyurethane coating and sealer that is characterised by its vapour-permeable and weather-resistant properties. This versatile coating offers reliable protection from the elements while providing a durable, resistant and visually appealing surface. EUROPUR 0425 is ideal for applications where both flexibility and resistance to environmental influences are required.

APPLICATION AREAS

- is used for coating/sealing and colouring concrete balcony and terrace surfaces.

PRODUCT FEATURES

- Solvent-based
- UV stable
- weatherproof
- elastic
- Vapour permeable





TACTICAL
— SUPPLY PAKISTAN —

AT A GLANCE

COLOUR	Standard and special colours
MATERIAL BASIS	Polyurethane
MATERIAL CONSUMPTION	0,4-0,5 kg/m2
ELONGATION AT BREAK ACCORDING TO DIN 53504	170 %
CONSISTENCY	Medium viscosity
DURABILITY	UV stable weather resistant
STORAGE AND SHELF LIFE	Cool and dry, +10°C to +25°C, 12 months in unopened original container
PROCESSING CONDITIONS	Processing temperature +10 to +25 °C
MIXING RATIO	A : B = 175 : 50

CONTENTS	Item number
6 KG	400425XXXXE1006
12,5 KG	400425XXXXE1125



EUROPUR 0430

EUROPUR 0430 is a transparent, glossy and UV-stable 2-component polyaspartic topcoat sealer. Thanks to its low-viscosity formulation, it enables intensive wetting and adhesion to the surfaces to be sealed. This high-quality sealer not only provides long-lasting protection, but also ensures an aesthetically pleasing, glossy surface that is optimally protected against UV radiation and environmental influences. EUROPUR 0430 is ideal for applications where transparency, gloss and resistance are required.

APPLICATION AREAS

- Indoors and outdoors
- Preferred on smooth and scattered EP and PUR coatings
- for various substrates such as wood, metal, etc. (a suitable primer may be required)

PRODUCT FEATURES

- low viscosity
- light-stable
- Transparent
- shiny
- Very good adhesion to various substrates
- Very good mechanical load capacity
- Very good weather and UV resistance
- Very good plasticiser resistance





TACTICAL
— SUPPLY PAKISTAN —

AT A GLANCE

COLOUR	transparent / glossy
MATERIAL BASIS	Polyaspartic
MATERIAL CONSUMPTION	0,15 - 0,2 kg/m2
NUMBER OF COMPONENTS	2
VISCOSITY	800 - 1000 mPas
DURABILITY	light-stable Weather and UV resistance
STORAGE AND SHELF LIFE	Cool and dry, +10°C to +25°C, 12 months in unopened original container
PROCESSING CONDITIONS	Processing temperature +10 to +25 °C
MIXING RATIO	A : B = 1,42 : 1
PROCESSING TIME	approx. 15 min

CONTENTS	Item number
5 KG	4004400000E1005
12,5 KG	4004400000E1125



EUROPUR 0440

EUROPUR 0440 is a transparent, matt polyurethane sealer that is characterised by its elastic, vapour-permeable and weather-resistant properties. This versatile sealer offers long-lasting protection and provides a robust, resistant surface that reliably protects against the weather, even in demanding outdoor areas. EURO-PUR 0440 is the ideal solution for applications that require a matt appearance with high flexibility and weather resistance.

APPLICATION AREA

- is used for sealing balconies and terrace areas.

PRODUCT FEATURES

- Solvent-based
- UV stable
- Very good weather resistance
- elastic
- silk matt
- Vapour permeable





TACTICAL
— SUPPLY PAKISTAN —

AT A GLANCE

COLOUR	Transparent, silk matt
MATERIAL BASIS	Polyurethane
NUMBER OF COMPONENTS	1
CONSISTENCY	Low viscosity
SEALS	approx. 1.0 g/cm3
MATERIAL CONSUMPTION	0,15-0,25 kg/m2
DURABILITY	UV stable Very good weather resistance
STORAGE AND SHELF LIFE	Cool and dry, +10°C to +25°C, 12 months in unopened original container
PROCESSING CONDITIONS	Processing temperature +10 to +25 °C

CONTENTS	Item number
5 KG	4004400000E1005
12,5 KG	4004400000E1125



EUROPUR 0445

EUROPUR 0445 is a matt, elastic polyurethane coating and sealant that is characterised by its vapour-permeable and weather-resistant properties. This high-quality coating not only provides reliable protection against the weather, but also ensures a flexible and resistant surface. EUROPUR 0445 is ideal for applications where a matt appearance and high vapour permeability are required, making it an excellent choice for demanding environments.

APPLICATION AREAS

- is used for the colour design of concrete balcony and terrace surfaces and arcades etc.

PRODUCT FEATURES

- Solvent-based
- UV stable
- weatherproof
- elastic
- Mechanically resistant
- Vapour permeable
- Indoor and outdoor use
- Easy cleaning
- Good resistance for normal loads





TACTICAL
— SUPPLY PAKISTAN —

AT A GLANCE

COLOUR	Standard and special colours
MATERIALBASIS	Polyurethane
MATERIALVERBRAUCH	0,4-0,5 kg/m2
KOMPONENTENANZAHL	1
DICHTE	1,6 g/cm3
DAUERHAFTIGKEIT	UV stable weather resistant
LAGERUNG UND HALTBARKEIT	Cool and dry, +10°C to +25°C, 12 months in unopened original container
VERARBEITUNGSBEDINGUNGEN	Processing temperature +10 to +25 °C

CONTENTS	Item number
6 KG	400445XXXXE1006
12,5 KG	400445XXXXE1125





TACTICAL
— SUPPLY PAKISTAN —

EUROPUR 0460


EUROPUR 0460 is a solvent-free, low-viscosity, aqueous 2-component polyurethane system characterised by its excellent UV stability. This colourless product provides reliable protection for various surfaces and is ideal for applications where a transparent and durable coating is required. EUROPUR 0460 not only provides an aesthetically pleasing appearance, but also ensures high resistance to weathering, making it ideal for use in demanding environments.

APPLICATION AREAS

- is used for the subsequent sealing and matting of plastic floors/coating surfaces in dry interior areas with light to medium loads.

PRODUCT FEATURES

- solvent-free
- UV stable
- matt finish
- Good abrasion resistance

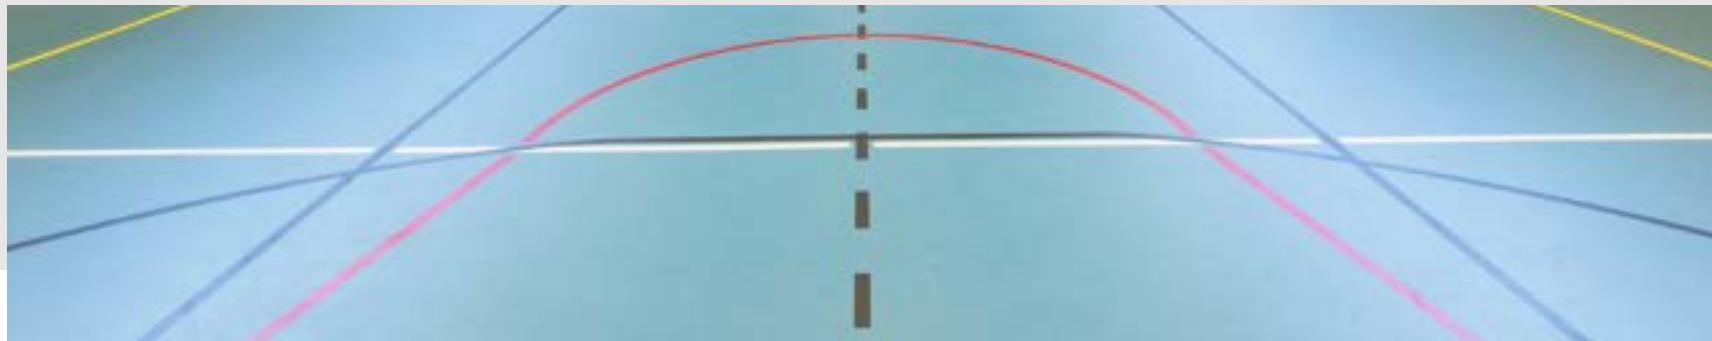

AT A GLANCE

COLOUR	transparent, matt
MATERIAL BASIS	Polyurethane
NUMBER OF COMPONENTS	2
MATERIAL CONSUMPTION PER LAYER	approx. 80 g/m ²
CONSISTENCY	Low viscosity
SEALS	1,1 g/cm ³
DURABILITY	UV stable Good abrasion resistance
STORAGE AND SHELF LIFE	Cool and dry, +10°C to +25°C, 12 months in unopened original container
PROCESSING CONDITIONS	Processing temperature +10 to +25 °C
MIXING RATIO	A : B = 4 : 1
PROCESSING TIME	approx. 30 min

CONTENTS	Item number
1 KG	4004600000EK001
6 KG	4004600000EK030



EUROPUR 0465

EUROPUR 0465 is a pigmented, water-based, 2-component polyurethane matt sealer that is solvent-free and medium viscosity. This high-quality product offers good mechanical and chemical properties that make it ideal for plastic coatings. EUROPUR 0465 not only ensures an attractive matt surface, but also provides reliable protection against wear and chemical influences. This makes it the perfect choice for applications where both aesthetics and durability are required.

APPLICATION AREAS

- is used for the subsequent matting of coating surfaces in dry interior areas with light to medium loads.

PRODUCT FEATURES

- solvent-free
- UV stable
- matt finish
- Good abrasion resistance





TACTICAL
— SUPPLY PAKISTAN —

AT A GLANCE

COLOUR	Standard and special colours
MATERIAL BASIS	Polyurethane
MATERIAL CONSUMPTION	approx. 120 g/m ²
NUMBER OF COMPONENTS	2
CONSISTENCY	Consistency
DURABILITY	UV stable Good abrasion resistance
SEALS	1,2 g/cm ³
STORAGE AND SHELF LIFE	Cool and dry, +10°C to +25°C, 12 months in unopened original container
PROCESSING CONDITIONS	Processing temperature +10 to +25 °C
MIXING RATIO	A : B = 6,7 : 1
PROCESSING TIME	approx. 30 min

CONTENTS	Item number
5 KG	400465XXXXEK005
10 KG	400465XXXXEK010



EUROPUR 0485

EUROPUR 0485 is a solvent-based, pigmented 2-component polyurethane top coat characterised by its excellent UV stability. This high-quality sealer not only offers effective protection against the effects of weathering, but also provides an attractive, colour-intensive surface. EUROPUR 0485 is ideal for applications where durability and aesthetics are of great importance and is ideal for sealing surfaces that are exposed to strong sunlight.

APPLICATION AREAS

- is used to seal smooth and scattered epoxy resin and polyurethane coatings, scattered coatings and the like. For indoor and outdoor use.

PRODUCT FEATURES

- Solvent-based
- low viscosity
- Very good weather and UV resistance
- pigmented
- High opacity
- Very good mechanical load capacity
- Impact and abrasion resistant
- Very good adhesion to various substrates (e.g. also metal, wood, etc.)





TACTICAL
— SUPPLY PAKISTAN —

AUF EINEN BLICK

COLOUR	Standard and special colours
MATERIAL BASIS	Polyurethane
VISCOSITY AT +23°C	300 - 500 mPa.s
MATERIAL CONSUMPTION	0,2-0,3 kg/m2
DURABILITY	Weather and UV resistance Mechanical strength
STORAGE AND SHELF LIFE	Cool and dry, +10°C to +25°C, 12 months in unopened original container
PROCESSING CONDITIONS	Processing temperature +10 to +25 °C
MIXING RATIO	A : B = 3 : 1
PROCESSING TIME	approx. 40 min

CONTENTS	Item number
5 KG	400485XXXXEK005
10 KG	400485XXXXEK010
30 KG	400485XXXXEK030

