



TACTICAL
— SUPPLY PAKISTAN —

BINOCULAR 675

Thermal Binocular (3000m) Range



www.tacticalsupplypakistan.com

01



info@tacticalsupplypakistan.com

BINOCULAR 675

Thermal Binocular (3000m) Range



TACTICAL
— SUPPLY PAKISTAN —



Built-in laser rangefinder with a 1535nm wavelength



8 hours operating time



GPS/BeiDou positioning



Electronic compass



75mm lens for long range



IP67



www.tacticalsupplypakistan.com

02



info@tacticalsupplypakistan.com

Specification

Detector

Resolution 640×512

Optical characteristics

Objective lens, mm 75

Magnification 4×

FOV (HxV), m@100m 10.24×8.2

Display

Resolution 1024×768

External video WIFI/PAL

Power Supply

Battery 2×18650

Operating time (at t=22°C), h 8

Physical characteristics

Weight without battery, g 1450

Dimension, mm 210×160×90

Environmental compatibility

Ingress protection rating IP67

Operating temperature, °C -40~+60

Laser rangefinder

Wavelength, nm 1535

Measuring range, m 5-3000

Measurement accuracy, m ±1

Extreme Detection Range

Detection range 5000m  1.7m

Recognition range 1500m


Detection range 6500m

Recognition range 2000m





TACTICAL
— SUPPLY PAKISTAN —

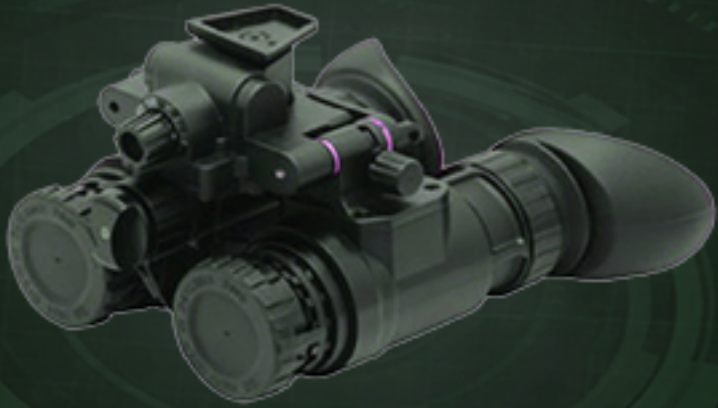

GEFS

Night Vision Goggle



www.tacticalsupplypakistan.com

04



info@tacticalsupplypakistan.com



Dual tube goggle



Compact and lightweight



Convenient hands-free operation



Excellent image quality

Specification

Magnification	1×	Battery type	CR123 (A)×1
FOV (degree)	42+/-3	Battery life , h	80 (IR OFF)/40 (IR ON)
Reticle	Internal (optional)	Operating temperature , °C	-0,8
Weight (without battery), g	300	Relative humidity, %	5-98
Power supply, V	2.6-4.2	Environment rating	IP65/IP67 optional

